


ProCraft BC Beam Clamp

Provides a quick and easy rigging point for hoists, blocks and slings. It is lightweight and offers a versatile range of adjustment for ease of installation.

The design and specification of the ProCraft BC Beam Clamp includes:

- Range 1 Tonne to 10 Tonne
- Light weight design, and durable construction
- Direct connection to beam for a lower headroom
- Threaded spindle can be locked
- Not to be used for lifting people, personal safety or restraint
- Each clamp is proof load tested to 1.5 times the working load limit
- Meets or exceeds ASME B30.11

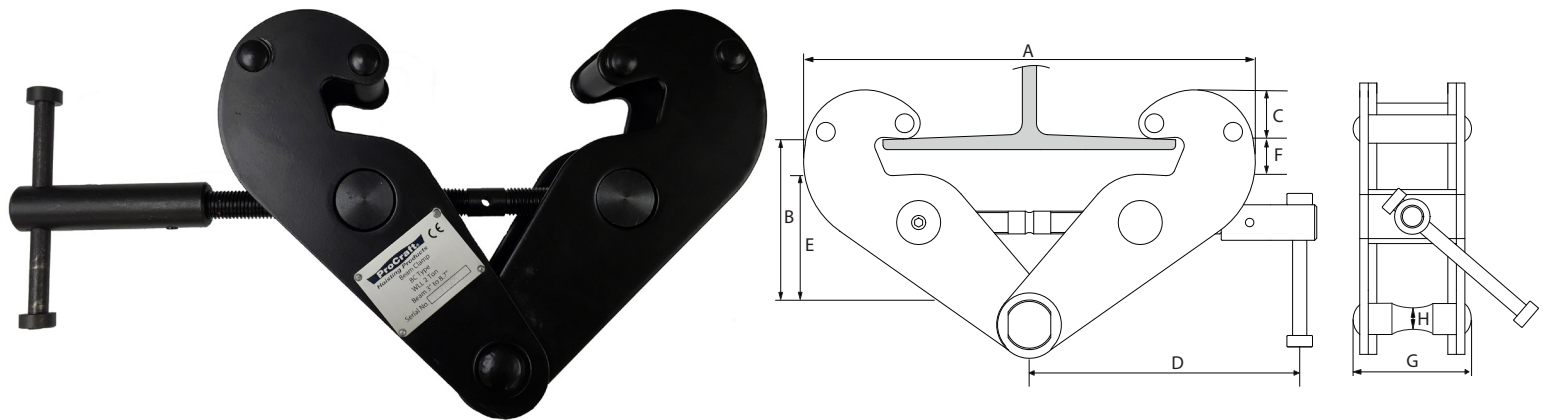


Wesco Part Number	Capacity Tonnes	I Beam Width Inches	Dimensions Inches								Weight Pounds
			A min/ max	B min/ max	C	D	E min/ max	F	G	H	
91BMC-BC01	1	3.0 to 9.0	7.3 13.8	4.5 5.9	8.5	1.2	1.7 3.2	0.8	3.3	0.8	9.9
91BMC-BC02	2	3.0 to 9.0	7.3 13.8	4.5 5.9	8.5	1.3	1.7 3.2	0.8	3.7	0.8	11.5
91BMC-BC03	3	3.2 to 12.6	9.1 17.9	7.1 8.8	10.0	1.6	3.0 4.7	1.3	4.8	0.9	22.0
91BMC-BC05	5	3.2 to 12.6	9.5 17.5	7.1 8.8	10.0	1.7	3.0 4.6	1.3	5.1	1.1	24.4
91BMC-BC10	10	3.5 to 12.6	10.5 18.9	6.9 8.7	10.8	1.6	2.6 4.3	1.4	5.7	1.5	44.0

ProCraft BCS Beam Clamp

Provides a quick and easy rigging point for hoists, blocks and slings. It offers a versatile range of adjustment for ease of installation, with a shackle to accept larger hooks or attachments.

The design and specification of the ProCraft BCS Beam Clamp includes:

- Range 2 Tonne to 3 Tonne
- Wider beam flange adjustment
- Shackle hanger which accepts larger hooks or Rigging
- Threaded spindle can be locked.
- Not to be used for lifting people, personal safety or restraint
- Each clamp is proof load tested to 1.5 times the working load limit
- Meets or exceeds ASME B30.11

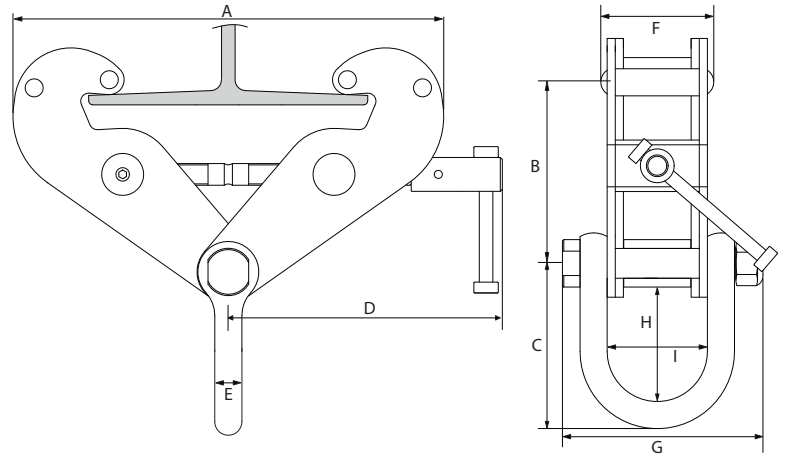


Wesco Part Number	Capacity Tonnes	I Beam Width Inches	Dimensions Inches									Weight Pounds
			A max	B	C	D	E	F	G	H	I	
91BMC-BCS02	2	2.75 to 9.6	14.2	6.1	4.8	8.5	0.89	3.3	5.8	3.6	2.9	12.1
91BMC-BCS03	3	2.75 to 14.0	19.3	8.9	5.7	10.0	0.96	4.4	7.4	4.3	4.1	25.3

ProCraft BCU Beam Clamp

Provides a quick and easy rigging point for hoists, blocks and slings. It has been designed for vertical use, and side load applications, where conventional clamps are not.

The design and specification of the ProCraft BCU Beam Clamp includes:

- Range 2 tonne to 10 tonne
- Designed for both vertical and side loading applications, it can be loaded at any angle
- Built-in connection point for a low headroom
- Highly flexible for lifting and pulling, and can be used as a semi-permanent anchor point
- Multi-directional adjusting screw spindle ensures a high clamping force to beam web
- Not to be used for lifting people, personal safety or restraint
- Each clamp is proof load tested to 1.5 times the working load limit
- Meets or exceeds ASME B30.20

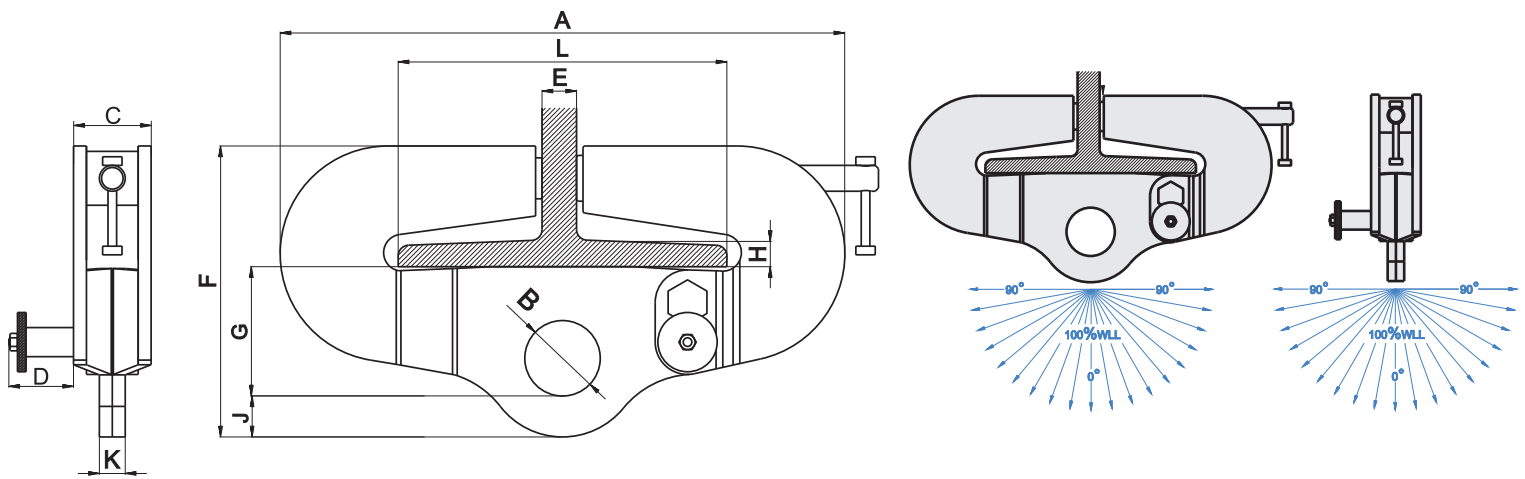

Wesco Part Number	Capacity		L Beam Width	Dimensions										Weight
				A	B	C	D	E	F	G	H	J	K	
91BMC-BCU02	4,400 lbs	Inches	5 to 8	14.8	2.3	2.6	2.2	1.3	8.5	3.7	1.0	0.9	0.6	21.4 lbs
	2 tonne	mm	125 to 204	376	58	66	57	32	217	93	25	23	16	9.7 kg
91BMC-BCU03	6,600 lbs	Inches	5 to 8	15.2	2.4	2.8	2.2	1.3	9.2	3.9	1.0	1.1	0.8	27.6 lbs
	3 tonne	mm	125 to 204	387	60	70	57	32	235	100	25	28	20	12.5 kg
91BMC-BCU05	11,000 lbs	Inches	5 to 12	20.7	2.8	2.9	2.4	1.3	10.6	4.7	1.0	1.5	0.9	45.2 lbs
	5 tonne	mm	125 to 305	527	70	74	60	32	270	120	25	38	24	20.5 kg
91BMC-BCU10	22,000 lbs	Inches	5 to 12	20.7	2.8	2.9	2.4	1.3	10.9	4.7	1.0	1.5	0.9	59.1 lbs
	10 tonne	mm	125 to 305	527	70	74	60	32	278	120	25	38	24	26.8 kg