


ProCraft MH-A Chain Hoists

SMALLER AND LIGHTER HOIST


Heavy material just got easier. The MH Series is 20% lighter, 20% thinner, and offers the smallest head room compared to the closest competitor on the market.

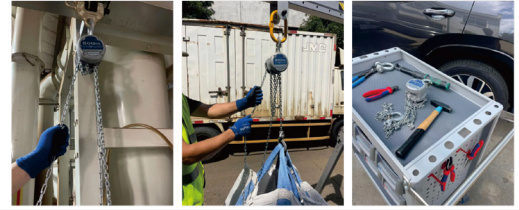

Capacity (tonnes)	1/4
Model #	MHA-0.25
No of Falls	1
Test load	t 0.375
	kN 3.7
Load Chain	in 0.13 x 0.35
	mm 3.2 x 9.0
Standard Lift	ft 10
	mtr 3.05
Pull at rated load	lbf 33
	N 147
Pulled chain for 1 metre lift (3.2 feet)	ft 111
	mtr 33.8
Net Weight	lbs 6.17
	kgs 2.8

a	inches 3.62
	mm 92
b	inches 3.31
	mm 84
c	inches 8.86
	mm 225
e	inches 1.50
	mm 38
f	inches 2.09
	mm 53
g	inches 0.83
	mm 21
s	inches 1.26
	mm 32
t	inches 0.43
	mm 11

Dimensions

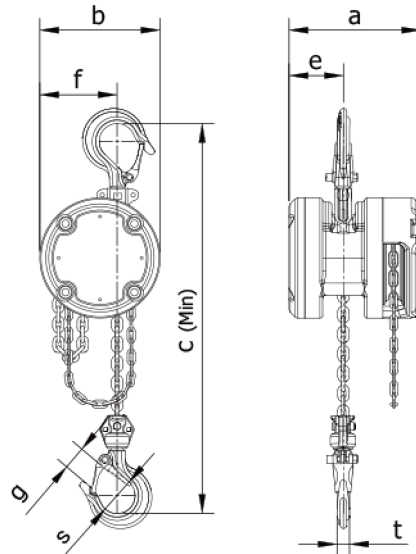

Easy installation in higher positions! Wide internal diameter of hook for easier hookups!



Easy-to-hold, smooth to the touch aluminum body

Operating conditions

Operating temperature -40°F (-0.40°C) to 140°F (60°C). Operating humidity range for the hoist is under 100% RH, this product can not be used in water. Standard materials are used, special materials such as spark less materials and asbestos are NOT used. With regard to the environmental load substances, six substances defined in the RoHS directives are not contained in this product. Manufactured in a ISO 9001 Quality Assured Firm.