

The versafit harness is Tractel®'s most versatile harness. With its adjustable leg, shoulder, chest and sub-pelvic straps it can be adjusted to a perfect fit for maximum comfort.

For further information, refer to the "Use and Maintenance Instructions" for harnesses and lanyards.

FEATURES

- Adjustable sub-pelvic strap
- Seven-point adjustment
- Adjustable back D-ring
- Adjustable chest strap
- Lanyard retaining clips on both shoulder straps
- Fall indicators / inspection tag / serial number
- Accommodates tool belt up to 4 in. (102 mm) wide
- Ideal for use with Tracvest
- Two colors: blue shoulder straps and black leg straps

APPLICATIONS

- Fall arrest
- Optional:
 - work positioning
 - retrieval
 - ladder climbing
 - suspension


APPLICABLE STANDARDS

- CSA Z259.10-12
- ANSI Z359.1-2007
- ANSI Z359.11-2014
- ANSI A10.32-2012
- OSHA 1926
- OSHA 1910
- New York BSA approval 9607 (for quick connect legs)
- New York BSA approval 9608 (for tongue and buckle legs)

SIZES

- One size fits most: AC732
- Small: AC732S
- Medium: AC732M
- Large: AC732L
- X-large: AC732XL
- XX-large: AC732XXL

*Available sizes may vary by model.

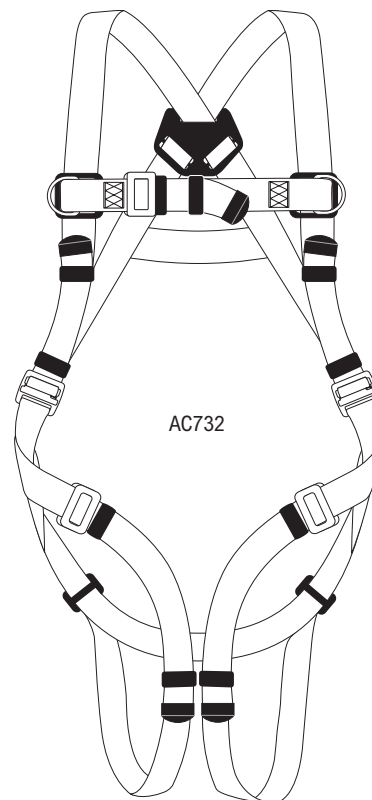


AVAILABLE MODELS

AC732




- Quick-connect legs
- Back dorsal D-ring
- Adjustable chest strap
- Available sizes:
S, one size, XL and XXL

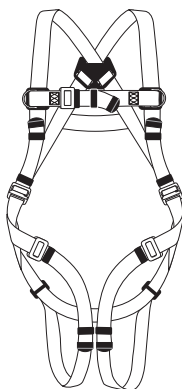

AD732




- Tongue and buckle legs
- Back dorsal D-ring
- Adjustable chest strap
- Available sizes:
S, one size, XL and XXL

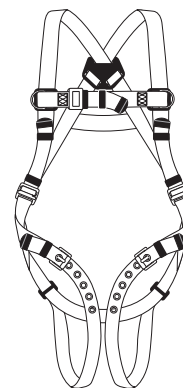

AC742




- Quick-connect legs
- Back dorsal D-ring
- Side positioning D-rings
- Adjustable chest strap
- Available sizes:
S, one size, XL and XXL

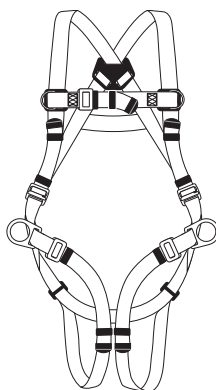

AD742




- Tongue and buckle legs
- Back dorsal D-ring
- Side positioning D-rings
- Adjustable chest strap
- Available sizes:
S, one size, XL and XXL

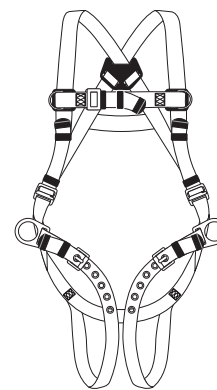

AD714




- Tongue and buckle legs
- Back dorsal D-ring
- Retrieval D-rings
- Sternal D-ring
- Fixed chest strap
- Available sizes:
S, one size, XL and XXL

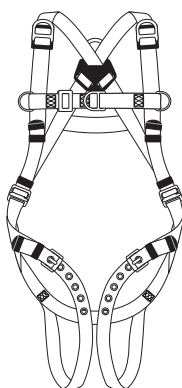

EBD95



- Tongue and buckle legs
- Back dorsal D-ring
- Removable belt
- Fall arrest applications
- Side positioning D-rings
- Adjustable chest strap
- Available sizes:
M, L and XL

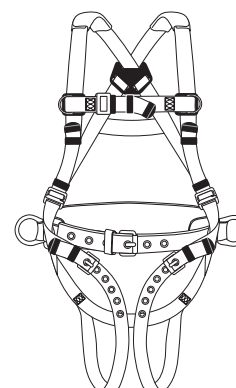

PARTS	SPECIFICATIONS
WEBBING	High tenacity polyester Width: 1¾ in. (45 mm) Thickness: ⅛ in. (1.4 mm) Maximum breaking strength: 5,700 lbs. (25.4 kN) Webbing is heat-cut to prevent fraying.
TONGUE AND BUCKLE WEBBING (LEGS)	High tenacity polyester Width: 1¾ in. (45 mm) Thickness: ⅛ in. (3 mm) Maximum breaking strength: 9,000 lbs. (40 kN) Webbing is heat-cut to prevent fraying.
STITCHING	Harness is lock-stitched. Thread: #138 polyester
BACK AND SIDE D-RINGS	Plating: zinc dichromate Proof-loaded 100% at 3,600 lbs. (16 kN) Maximum breaking strength: 5,000 lbs. (22.2 kN)
SLIDING BAR ADJUSTER	Plating: zinc dichromate Maximum breaking strength: 4,000 lbs. (17.8 kN)
QUICK CONNECT BUCKLE	Plating: zinc dichromate Maximum breaking strength: 4,000 lbs. (17.8 kN)
TONGUE AND BUCKLE	Plating: zinc dichromate Maximum breaking strength: 4,000 lbs. (17.8 kN)
GROMMETS	#2 spur brass
PLASTIC AND ELASTIC RETAINERS	Each webbing strap with a free end has keeper loops.
CAPACITY	386 lbs. (175 kg), one person