


ProCraft TP BeamTrolley

A heavy duty traditional beam type girder trolley. Designed to move loads along universal beams smoothly and efficiently.

The design and specification of the ProCraft TP Beam Trolley includes:

- Range 1/2 Ton to 3 Ton
- Light weight design, and durable construction
- Single hanger design
- Anti drop plates
- Wheels lubricated and equipped with bearings for extended life
- Not to be used for lifting people, personal safety or restraint
- Each trolley is proof load tested to 1.5 times the working load limit
- Meets or exceeds ASME B30.11

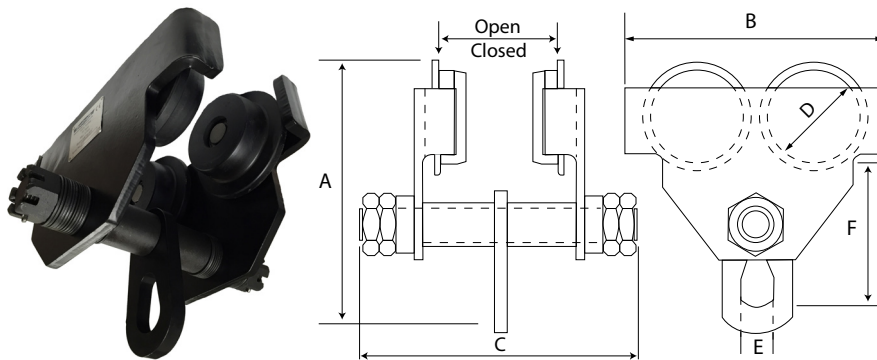


Wesco Part Number	Capacity Tonnes	I Beam Width Inches	Minimum Curve Radius Inches	Dimensions Inches						Weight Pounds
				A	B	C	D	E	F	
91TRL-TP050	1/2	2.6 to 5.0	31.4	7.5	7.7	8.2	2.4	0.9	4.3	12.1
91TRL-TP100	1	3.1 to 5.7	35.4	8.3	9.3	9.5	2.9	1.2	4.5	21.0
91TRL-TP200	2	3.1 to 6.6	39.4	9.3	10.7	11.0	3.5	1.4	5.1	29.8
91TRL-TP300	3	3.5 to 6.6	47.2	11.6	12.6	11.8	4.4	1.8	6.4	55.1

ProCraft PTB Beam Trolley

A heavy duty beam type girder trolley with adjusting rod. Designed for quick installation and to move loads along universal beams smoothly and efficiently.

The design and specification of the ProCraft PTB Beam Trolley includes:

- Range 1/2 Ton to 5 Ton
- Quick installation with wide beam adjustment
- Hoist fits directly to trolley for a lower headroom.
- Anti drop plates
- Wheels lubricated and equipped with bearings for extended life
- Not to be used for lifting people or personal safety or restraint.
- Each trolley is proof load tested to 1.25 times the working load limit
- Meets or exceeds ASME B30.11

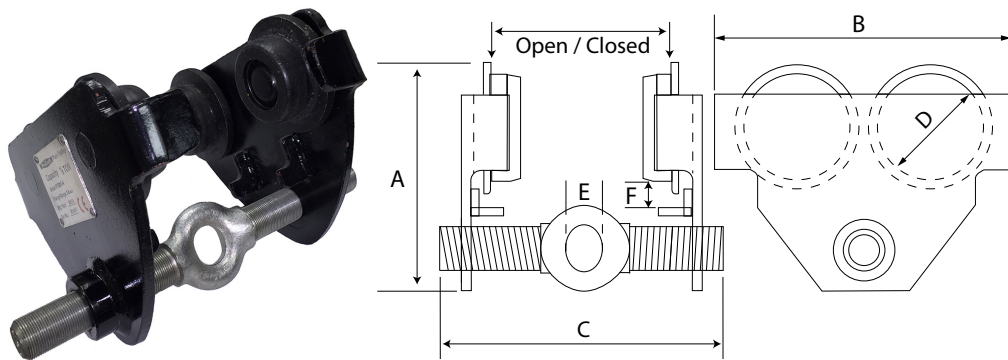

Wesco Part Number	Capacity Tonnes	I Beam Width Inches	Minimum Curve Radius Inches	Dimensions Inches						Weight Pounds
				A	B	C	D	E	F	
91TRL-PTB050	1/2	2.0 to 8.7	35.4	6.8	8.8	11.5	2.3	1.0	1.2	18.1
91TRL-PTB100	1	2.2 to 8.7	39.4	7.4	9.9	11.8	2.3	1.2	1.2	23.1
91TRL-PTB200	2	2.6 to 8.7	47.2	8.9	11.8	12.2	3.2	1.6	1.2	39.1
91TRL-TP200X	2	6.3 to 12.0	47.2	8.9	11.8	15.5	3.2	1.6	1.2	42.1
91TRL-PTB300	3	3.0 to 8.7	51.2	11.4	14.2	12.8	4.4	1.9	1.2	70.1
91TRL-PTB500	5	3.5 to 8.7	55.1	12.3	15.4	12.6	4.9	2.4	1.2	105.8