

ProCraft Marine Chain

Long link mooring


Hot dipped galvanized

Long link mooring chain is used extensively for mooring and anchoring docks, floats and buoys. The oversized long link is more acceptable to shackles passing directly into the chain links. The chain is hot dipped galvanized for better corrosion protection in marine environments. Higher grade chains offer increased strength to weight ratio for its given size.

Stock Code	Chain Size Inches (d)	Grade	Length Feet	Inside Dimensions (P x B)	Breaking Strength Pounds	Weight per Foot Pounds
08MO-GV12	3/8	30	200	2.55 x 0.77	10,000	1.31
08MO-GV12G7	3/8	70	200	2.53 x 0.63	26,400	1.17
08MO-GV16	1/2	30	200	3.23 x 0.98	17,000	2.05
08MO-GV16G7	1/2	70	200	3.15 x 0.94	40,000	2.16
08MO-GV20	5/8	30	200	3.75 x 0.91	26,500	2.94
08MO-GV24	3/4	2	200	4.92 x 1.45	42,082	4.71
08MO-GV32	1	2	200	6.10 x 1.95	74,633	7.43
08MO-GV40	1-1/4	2	90	5.00 x 2.00	119,413	13.74
08MO-GV48	1 1/2	2	90	6.00 x 2.40	168,307	19.22

Chain can be cut to length as required





ProCraft Marine Chains

Long link mooring


Self colour finish

Long link mooring chain is used extensively for mooring and anchoring docks, floats and buoys. The oversized long link is more acceptable to shackles passing directly into the chain links. Chain is a self colour finish to increase cost savings. Higher grade chains offer increased strength to weight ratio for its given size.

Stock Code	Chain Size Inches (d)	Grade	Length Feet	Inside Dimensions (P x B)	Breaking Strength Pounds	Weight per Foot Pounds
08MO-SC24	3/4	2	200	4.92 x 1.45	42,082	4.71
08MO-SC32	1	2	200	6.10 x 1.95	74,633	7.43
08MO-SC36	1-1/8	2	90	4.50 x 2.89	91,426	10.94
08MO-SC40	1-1/4	2	90	5.00 x 2.00	119,413	13.74

Chain can be cut to length as required



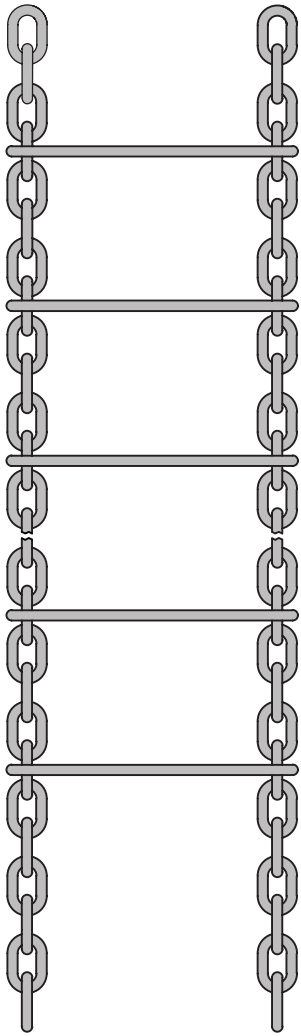

ProCraft Chain Ladders


Heavy duty marine docks

Hot dipped galvanized

These chain ladders are suitable for ports and marine docks and are built to withstand the toughest conditions. Two lengths are available 24 feet and 36 feet.

- 3/4 inch diameter side chain
- 3/4 x 24 inch ladder rung
- 3 links before first ladder rung and 6 links from the bottom ladder rung

44LAD-HDG242424 - 24 feet

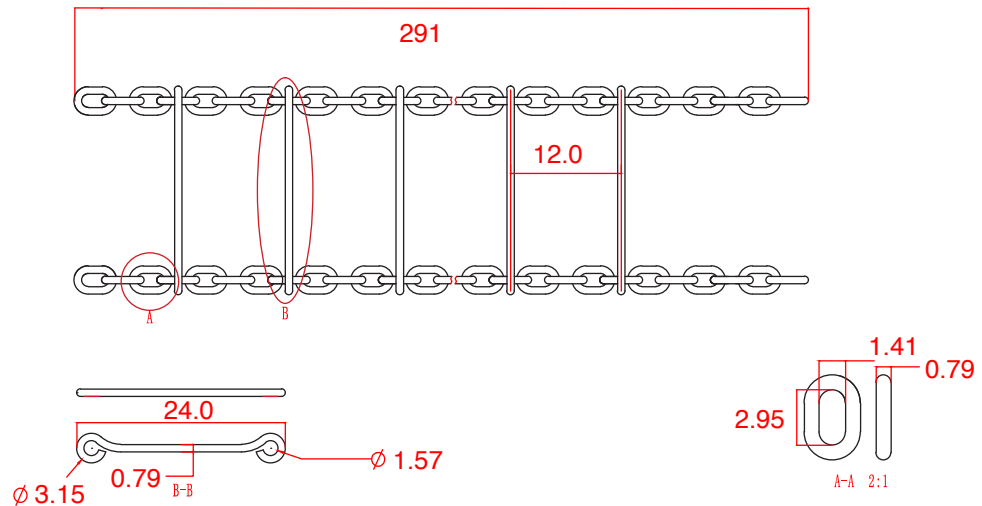


Details

1. Total length 24 feet, unmarked tolerance +/- 5%
2. 98 links of chain per side
3. 23 Ladder Rungs
4. Surface hot-dipped galvanized

Dimension in inches

44LAD-HDG242436 - 36 feet

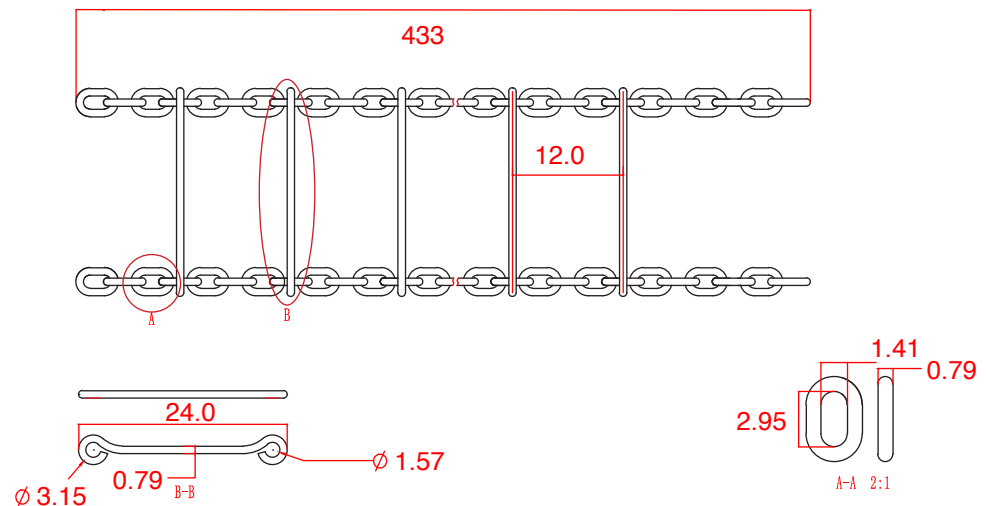

Details

1. Total length 36 feet, unmarked tolerance +/- 5%
2. 146 links of chain per side
3. 35 Ladder Rungs
4. Surface hot-dipped galvanized

Dimension in inches